
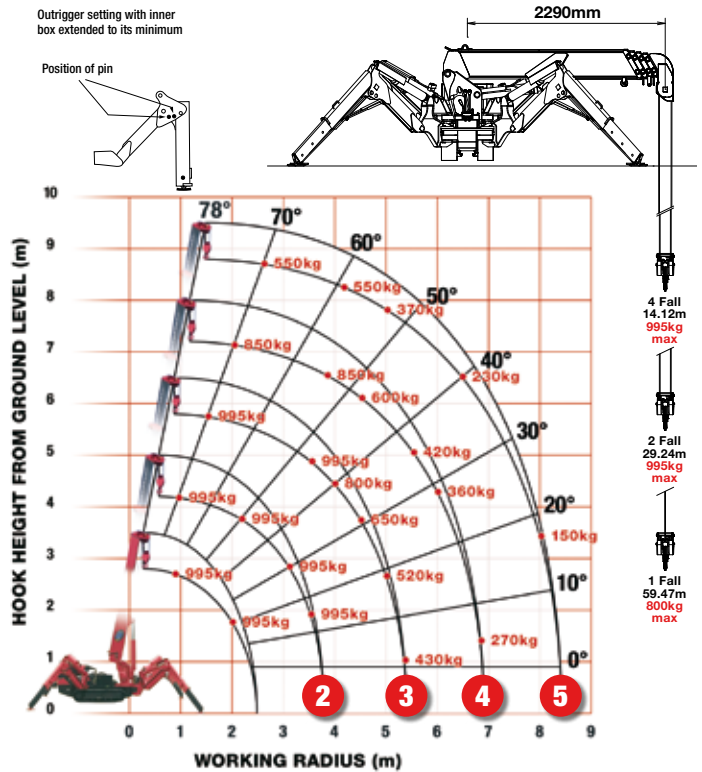


# RATED LOADS & OUTRIGGER POSITIONS

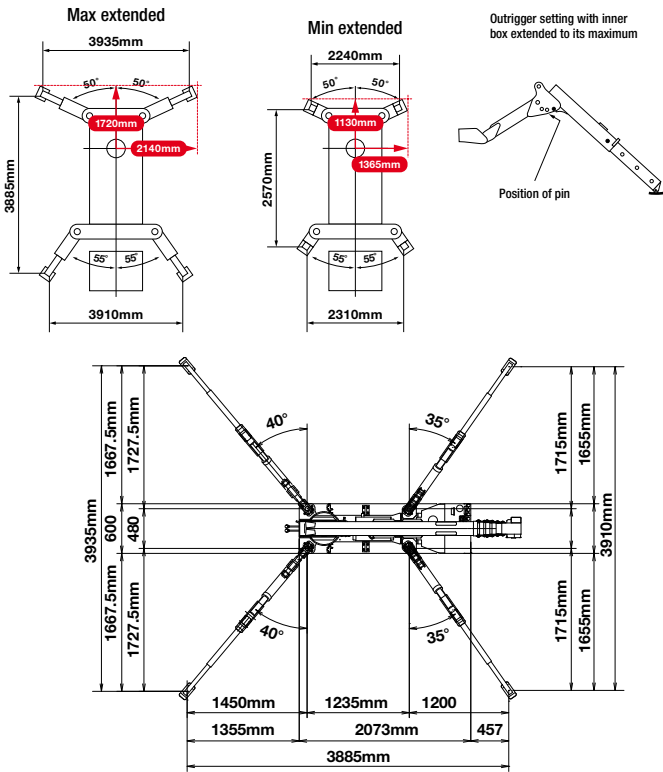

4 Fall  
14.12m  
995kg max

2 Fall  
29.24m  
995kg max

1 Fall  
59.47m  
800kg max

## SECOND STAGE EXTENDED 2.53 - 4.075M BOOM LENGTH

Working radius	m	up to 1.0	1.4	1.5	1.8	2.0	2.5	3.0	3.5	3.835
Outrigger	kg	995	995	995	995	995	995	995	995	900
	kg	995	995	995	995	995	650	490	350	250

## THIRD STAGE EXTENDED 4.075 - 5.61M BOOM LENGTH

Working radius	m	up to 2.2	2.5	2.9	3.0	3.5	4.0	4.5	5.0	5.37
Outrigger	kg	995	995	995	995	995	800	650	520	430
	kg	800	650	530	500	380	280	220	160	120

## FOURTH STAGE EXTENDED 5.61 - 7.13M BOOM LENGTH

Working radius	m	up to 3.3	3.8	4.0	4.5	5.0	5.5	6.0	6.5	6.89
Outrigger	kg	850	850	750	600	500	420	360	320	270
	kg	420	340	300	250	190	140	100	80	60

## FIFTH STAGE EXTENDED 7.13 - 8.65M BOOM LENGTH

Working radius	m	up to 3.8	4.1	4.5	5.0	5.5	6.0	6.5	7.0	8.0	8.41
Outrigger	kg	550	550	450	370	310	270	230	200	150	130
	kg	350	290	250	200	160	130	100	70	40	30

## SEARCHER HOOK SMALL - 300kg

Stowed position



In operation



Lifting capacity	300kg
Length	500mm
Weight	15kg
Tilt angles	0°, 20°, 40°, 60°

## DIMENSIONS



## OUTRIGGER POSITIONS

